



# SNAKESKIN™

## ACCESS POINT

### APPLICATION

Above-grade tracer wire termination and direct access point for utility locate transmitters. Attaches easily to gas meters and hydrants. Fits 10-18 AWG wire.



### Includes:

- 18" polyethylene tube
- Aluminum cap
- Dielectric gel
- Allen wrench 1/16"

### INSTALLATION INSTRUCTIONS

1. Strip insulation 1" from tracer wire
2. Slide polyethylene tube over tracer wire
3. Slightly back out set screw from insert
4. Apply dielectric gel (supplied) to end of tracer wire
5. Push stripped wire fully into aluminum cap
6. Use 1/16" Allen wrench; firmly tighten set screw on tracer wire

#### APWA UNIFORM COLOR CODE


	ELECTRIC
	GAS
	COMMUNICATION
	POTABLE WATER
	SEWER
	RECLAIMED WATER

**SNSK-\*-01** – Qty. 1

**SNSK-\*-Bulk25** – Qty. 25

**SNSK-\*-Bulk100** – Qty. 100

(\* denotes color)

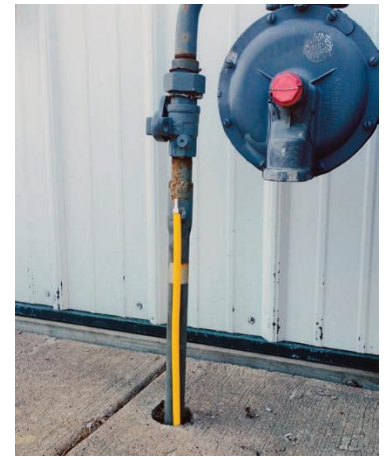

### FEATURES AND BENEFITS

- Aluminum cap provides direct connection point for utility locate transmitter
- Durable polyethylene tubing protects against weed whips and UV rays
- Dielectric gel protects wire from rust and corrosion
- Flexible, form fitting tubing enables multiple mounting options
- Easy installation
- Color-coded to meet American Public Works (APWA) standards

