




# MINI COBRA™

## ACCESS POINT FOR GAS

### APPLICATION

Prewired tracer wire access point sized right and designed to blend in with the gas meter. **Comes prewired with tracer wire and connected ground rod.**

Easily **clips onto riser casing** with optional riser clip (5 sizes available). Provides easy connection point for a utility locate transmitter to emit a low voltage signal on a tracer wire system. Efficiently connect and disconnect jumper to turn ground off/on as needed to isolate the target line.

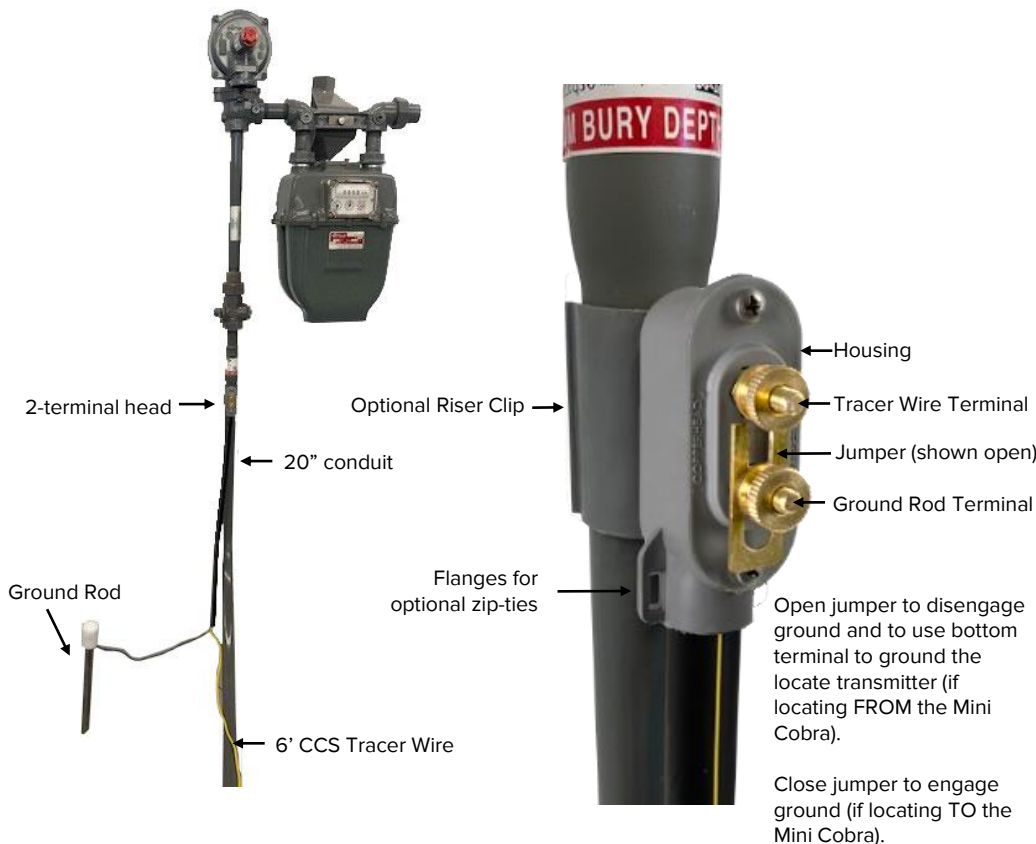

Preassembled unit includes:

- Mini Cobra Head/Housing – 2-terminal, gray, polypropylene, 2.875" x 1"
- Conduit – 20" L, .623" D
- Copperhead® copper-clad steel (CCS) tracer wire (10, 12, or 14 AWG), yellow, 6' L
- Ground Rod – 0.5-lb, 12" L, .826" D, magnesium, 6' CCS wire black/red
- Hardware – brass terminals, thumb nuts, jumper; stainless steel faceplate screws
- Riser Clip – optional, 5 sizes (see above)

**Product Number: MCGR-0.5-\*\*-\*\*\***

\*\* Gauge Options:

10 = 10 AWG, 12 = 12 AWG, 14 = 14 AWG

\*\*\* Riser Clip Options:

00 = no riser clip

75 = riser casing 1.05 OD, 3/4" x 1/2" riser

100 = riser casing 1.31 OD, 3/4" x 3/4" riser

125 = riser casing 1.66 OD, 1" x 1" riser

150 = riser casing 1.90 OD, 1 1/4" x 1 1/4" riser

200 = riser casing 2.38 OD, 2" x 2" riser



### FEATURES AND BENEFITS

- Small size and gray color **blends in with riser** for a clean aesthetic
- **Prewired with Ground Rod and Tracer Wire for easy installation**
- Protects wire from damage and corrosion
- For new or existing services
- Fits multiple riser casing diameters
- Polypropylene material is durable and maintenance-free
- Brass hardware for maximum conductivity

